

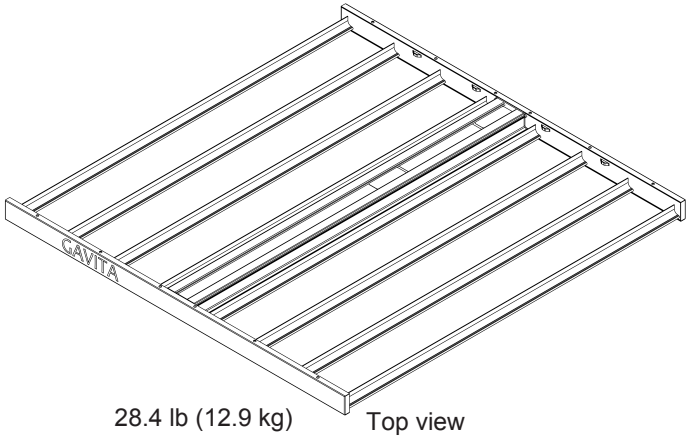
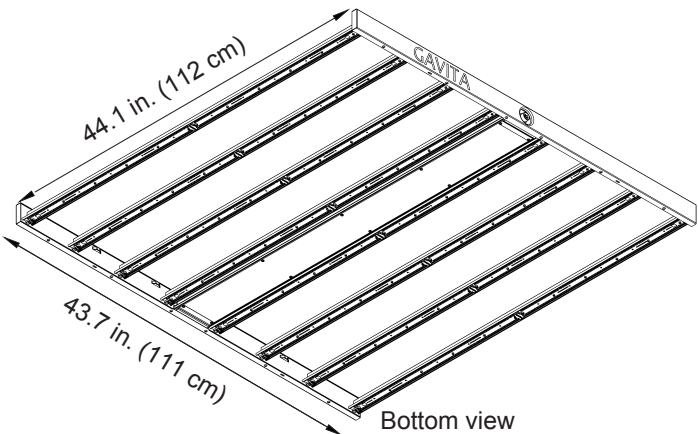


Gavita® Pro 1700e LED 120-277 V

Item #HGC906056

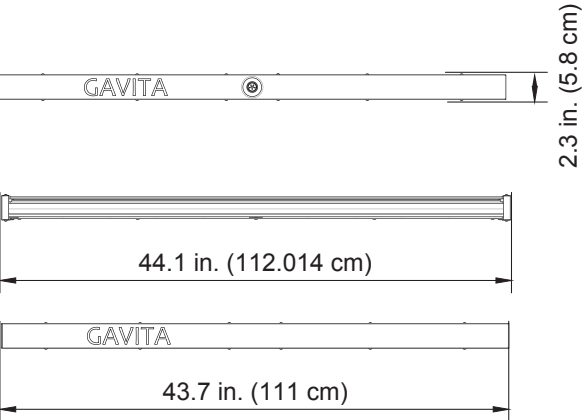

SPECIFICATIONS

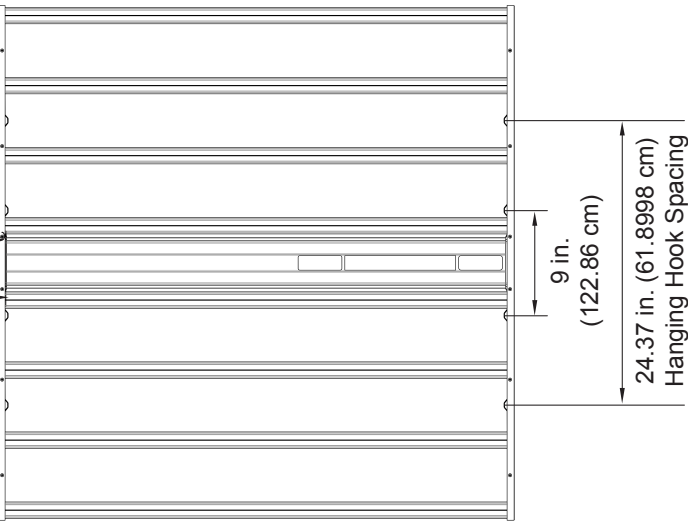

INPUT VOLTAGE: 120-277 V	
INPUT WATTS: 670 W	
HEAT LOAD: 2,300 btu/hr*	
CURRENT - 100%	
120 V:	5.7 A
208 V:	3.1 A
240 V:	2.7 A
277 V:	2.4 A
INRUSH CURRENT: < 45 A	
FREQUENCY: 50/60 Hz	
POWER FACTOR (cosφ): > 0.98	
Voltage THD	
120 V:	0.25%
277 V:	0.15%
Current THD	
120 V:	5.80%
277 V:	3.00%
AMBIENT TEMP: 32-104° F (0-40° C)	
ENVIRONMENTAL RATING: IP66	
CONTROL: 0-10 V DC Source (with e-Series Adapter)	
MOUNTING: Sun Grip® Light Hangers included	
WEIGHT: 28.4 lb	DIM: 44.1 in x 43.7 in x 2.3 in
CERTIFICATIONS	
UL 1598, UL 8800, & CSA C22.2 No. 250.0	
FCC Part 15, Non-consumer	
WARRANTY: 5 Years	

*Please consult HVAC Expert to calculate total heat load in your grow space



This document is not intended to be used for installation purposes. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

HawthorneGC.com | Canada: HawthorneGC.ca

HGC906056 Gavita® Pro 1700e LED 120-277V Spec-Sheet- Last Updated 06/25/2020