nextlight [PLUS]

SUPPLEMENTAL GREENHOUSE LIGHTING






nextlight.com



nextlight [PLUS]

Package Contents

- 1 Fixture with Attached DC Out Power Cord (2') **x1**
- 2 Driver x1
- 3 Fixture Hooks **x2**
- 4 Driver Hooks **x2**
- 5 NextLight Pro Series Power Cord (10') x1 (see available *Power Cord Voltage Options*)
- 6 NextLight Pro Series Control Cable (20') **x1**



Power Cord Voltage Options


			(\mathbf{Y})
120V	240V	277V	277V
(NEMA.5-15P)	(NEMA 6-15P)	(TWIST LOCK)	(OPEN-END/WHIP)

Product Dimensions Fixture Dimensions

Technical Specifications

SPECIFICATION	NEXTLIGHT PLUS PRO	
Operating Voltage	120-277 VAC	
Operating Frequency	50/60 Hz	
Input Current	2.67A @ 120V, 1.34A @ 240V, 1.16A @ 277V	
PPF	800	
Energy Use	320 Watts (305W @ 277V)	
PPF/Watt	2.6	
Operating Temperature	-4°F to 104°F (-20°C to 40°C)	
BTU Output	1100	
Fixture Dimensions (in/mm)	28.75 x 3.5 x 4.5 / 726.7 x 85.9 x 111.7	
Driver Dimensions (in/mm)	14.75 x 5 x 2.25 / 374 x 124.4 x 54.5	
Weight	17 lbs (7.71 kg)	
Warranty	5 Year Full	
Life Rating	Q90 > 50,000 Hours	
Certifications	DLC Hort, CE, UL 8800	
Environment	IP65, Wet Rated	


Driver Dimensions

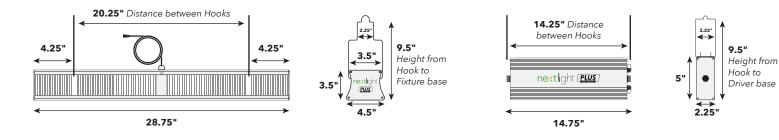

NextLight Full Spectrum LED

NextLight fixtures emit a full spectrum, bright white light which is more sun-like than even your traditional HPS. Using this spectrum you can expect tighter internodal spacing and better overall quality.

NextLight's Full Spectrum is easy to work under and provides the same sun-like qualities plants love without the negatives of high energy requirements and high heat.

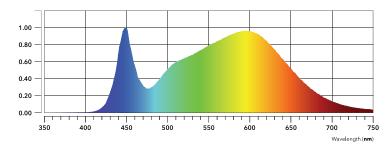

nextlight.com